



TRUCK AND BUS TYRES

PRODUCT CATALOGUE

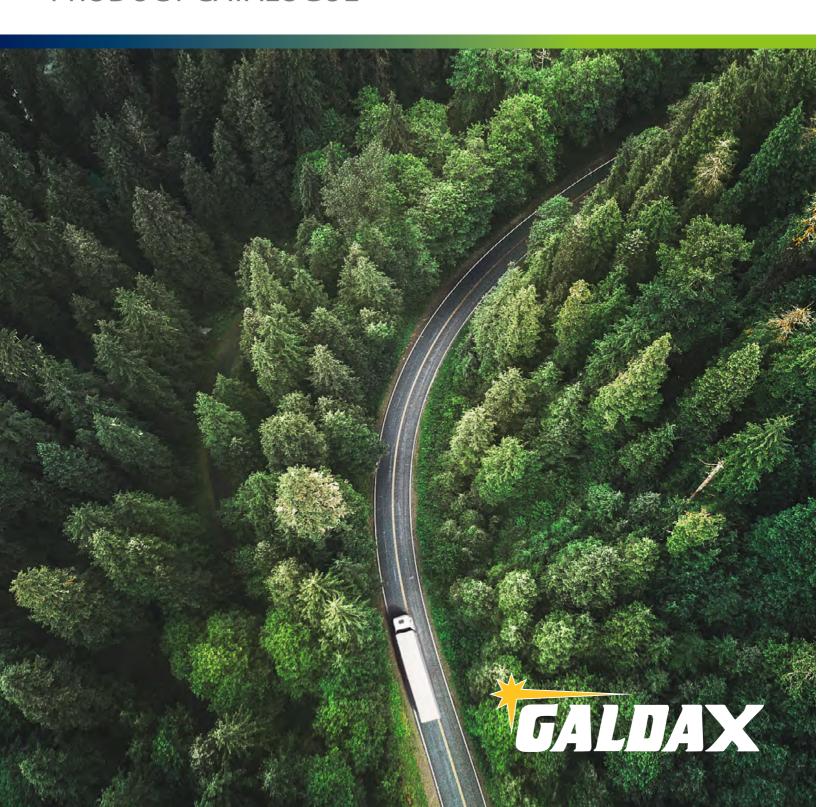

E+ PES is an advanced technology unique to EVERGREEN tyres that works to enhance key areas of driving experience.

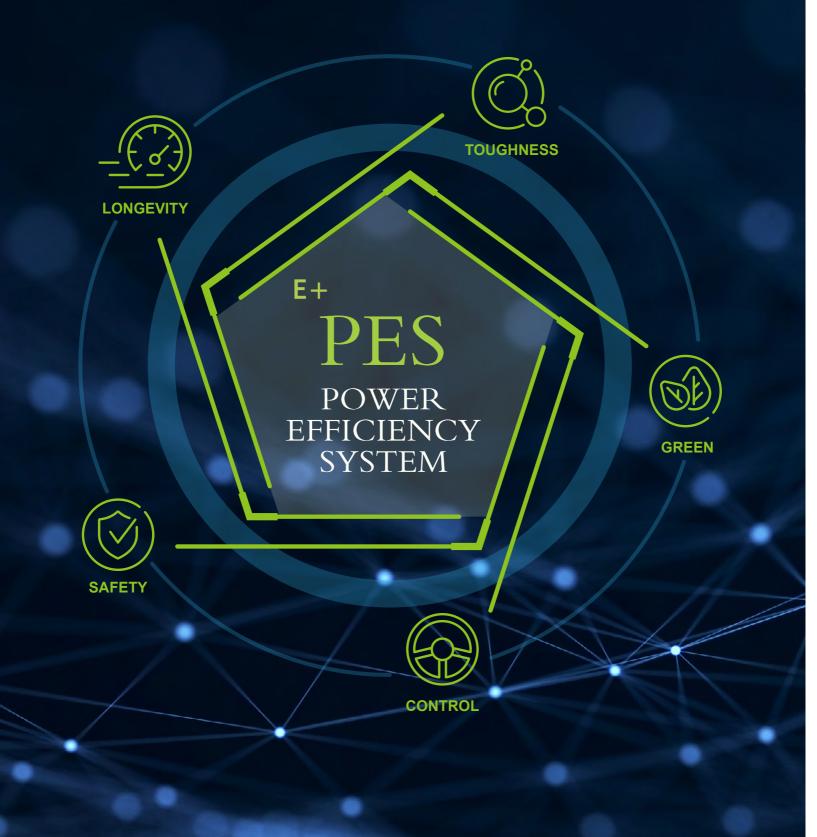





LONGEVITY

Evergreen Tyres have improved tyre durability, wear resistance with reduced risks of potential structural damage during their use. Our tyres feature Responsive Stress Distribution Technology (RSDT), High Conductive Frame Structure (HCFS), and Ultra Anti-Wear Tread Formula (UAWTF) for greater longevity. This combination of technologies maximise the mileage capability which in turn will reduce the tyre replacement expenses and maximise the value of the tyres.

TOUGHNESS

The outstanding toughness of EVERGREEN tyres can assist drivers and truck owners in even the most challenging of work environments, as it was developed with a series of specialized features made to withstand severe conditions.

CONTROL

As the only contact area between vehicle and ground, the tyre is critical to controlling. Using specially developed technologies such as Tread and Shoulder Reinforcement Technology TSRT), Optimized Contact Area Technology (OCAT), and Uniformity and Dynamic Balance Improve Program (UDBIP), our tyres were made to optimize controllability.

GREEN

Sustainability is at the core of EVERGREEN. In order to do our part in protecting the environment and lowering fuel consumption, we use Nano Silica Uniformity Tech (NSUT), Evergreen Manufacturing Programs (EMP), Ternary alloy wire (TAWI), a Vulcanizing Activator With Low Zinc Content (VALZ), and Low Hysteresis Carbon Black (LHCB) to reduce our carbon footprint.

SAFETY

Safety is the most important quality of any product. To protect our customers, Evergreen has put in place numerous guidelines to ensure that each EVERGREEN tyre is safe. Even in more extreme conditions, our Anti aquaplaning pattern design (AAPD) ensures your safety on wet and icy surfaces.

EVERGREEN, DRIVE TO THE FUTURE

We only have one Earth, and every individual must do their part in caring for it.

EVERGREEN takes this commitment seriously. The spirit of environmental sustainability is embedded in all the tyres we make.

We believe in doing our part to protect the world's limited resources by developing tyres in a sustainable, responsible way to ensure the health and wellbeing of our future generations.



The LineRoute Series





LineRoute ESL01




TECHNICAL FEATURES

Advanced silica-rich cap and base compounds provide maximized mileage and minimized fuel consumption.

The latest wave-shape groove design improves the steering accuracy while also ensuring fast reaction response during accelerating.

By optimizing the outline structure, each unit area of the tread can receive the pressure of the vehicle evenly to improve the wear performance.









Size	PR	LI/SS	Tread Depth (mm)	M+S			L	(C -1)))
275/70R22.5	16PR	148/145M	15	\checkmark	√	С	В	71dB	Α
275/80R22.5	18PR	149/146L	16	\checkmark	$\sqrt{}$	С	В	71dB	Α
295/60R22.5	18PR	150/147L	15	√	√	С	В	71dB	Α
295/80R22.5	18PR	154/149M	16	√	√	С	В	71dB	Α
315/70R22.5	18PR	156/150L	15.5	V	√	С	В	71dB	Α
315/80R22.5	20PR	156/153L	16.5	√	√	С	В	71dB	А




LineRoute EDL11



TECHNICAL FEATURES

The wider shoulder lugs enhance traction and water drainage.

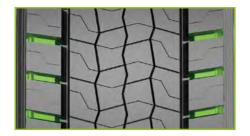

The highly effective contact area separates loading pressure evenly for better mileage performance.



Optimized compressive stiffness minimizes deformation and energy losses to reduce fuel consumption.





Size	PR	LI/SS	Tread Depth (mm)	M+S		(L))
295/60R22.5	18PR	150/147L	18	\checkmark	\checkmark	С	С	73dB	Α
295/80R22.5	18PR	154/149L	19	√	\checkmark	С	С	73dB	Α
315/70R22.5	18PR	156/150L	19	\checkmark	\checkmark	С	С	73dB	Α
315/80R22.5	20PR	156/153L	20	$\sqrt{}$	$\sqrt{}$	C	C	73dB	Α



LineRoute ETL23




TECHNICAL FEATURES


Ultra-tensile cord incorporated into the body material for excellent durability and retreadability.

The highly effective contact area separates loading pressure evenly for better mileage performance.

The latest silica-rich formula and cutting edge mixing technology ensure excellent tyre longevity and low rolling resistance.





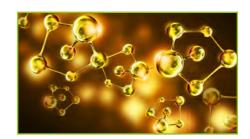



Size	PR	LI/SS	Tread Depth (mm)	M+S	<u> </u>		₩.	(C-1))))
385/55R22.5	20PR	160K	15	\checkmark	\checkmark	C	В	72dB	В
385/65R22.5	20PR	160K	15.5	\checkmark	$\sqrt{}$	C	В	72dB	В
385/65R22.5	24PR	164K	15.5	$\sqrt{}$	$\sqrt{}$	С	В	72dB	В



LineRoute ETL25




TECHNICAL FEATURES

Wide tread and 4 straight grooves provides excellent handling, traction and safety.

Optimized wear-resistant tread compound provides extra-long miles.

Unique tyre shoulder design reduces irregular wear and delivers excellent mileage performance.










Size	PR	LI/SS	Tread Depth (mm)	M+S			I		0))
435/50R19.5	20PR	160J	12.5	\checkmark	\checkmark	C	В	73dB	С
445/45R19.5	20PR	160J	13	\checkmark	$\sqrt{}$	С	В	73dB	С
425/65R22.5	20PR	165K	15.5	\checkmark	$\sqrt{}$	С	В	73dB	Α

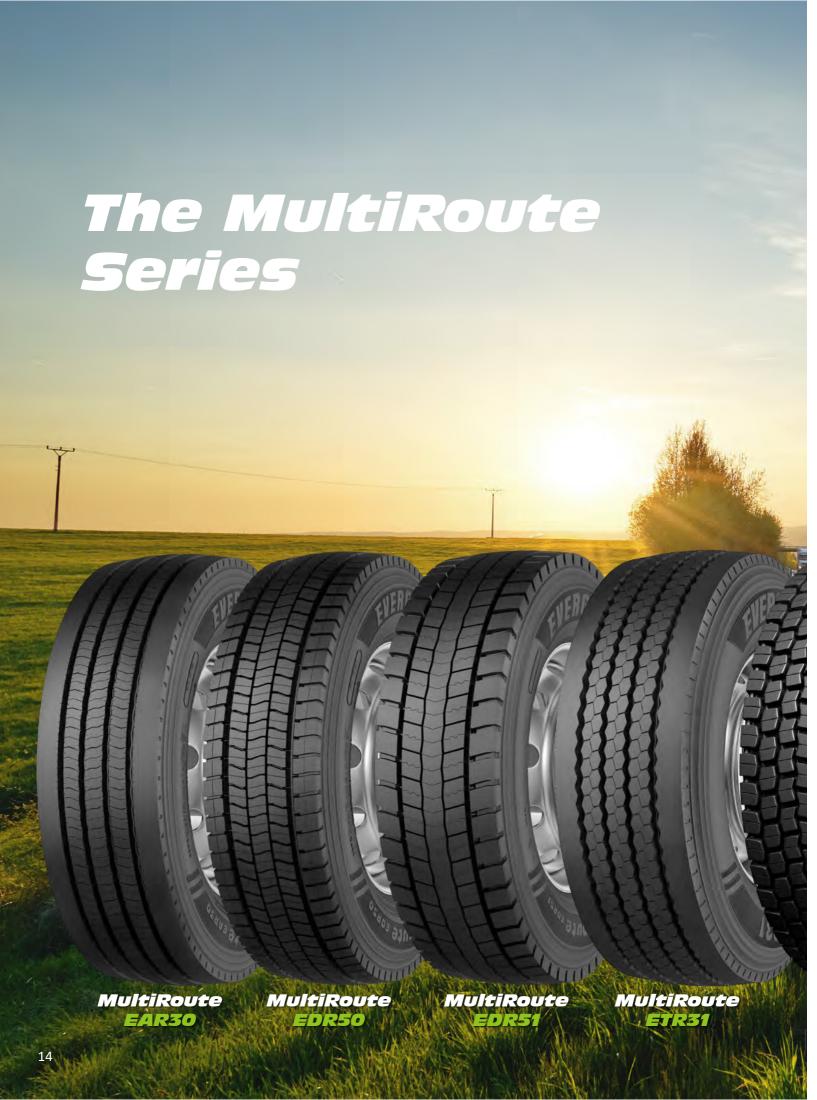



MultiRoute EAR30



TECHNICAL FEATURES


The optimized pattern design improves both dry and wet handling in changing regional traffic conditions.

The high, rigid belt structure enhances driving stability.

The enhanced tread formula ensures long tread life and excellent cut or chip resistance.









Size	PR	LI/SS	Tread Depth (mm)	M+S			₩.	(C -1)))
205/75R17.5	14PR	124/122M	13	\checkmark	√	С	С	73dB	В
215/75R17.5	16PR	135/133L	12.5	$\sqrt{}$	\checkmark	C	C	73dB	В
235/75R17.5	16PR	132/130M	13	\checkmark	\checkmark	C	C	73dB	В
235/75R17.5	18PR	143/141L	13	$\sqrt{}$	\checkmark	C	C	73dB	В
245/70R19.5	18PR	144/142J	13	$\sqrt{}$	\checkmark	С	С	73dB	В
265/70R19.5	18PR	143/141J	13.5	\checkmark	\checkmark	C	C	73dB	В
285/70R19.5	18PR	150/148K	14	$\sqrt{}$	\checkmark	С	C	73dB	В
295/80R22.5	18PR	154/149M	15.5	V	V	С	С	73dB	В



MultiRoute EDR50



TECHNICAL FEATURES

The unique pattern design enhances wet and dry grip, as well as water drainage.

The Silicon-rich tread compound ensures strong links in the polymer network for high abrasion resistance.

Regular pressure distribution ensures higher mileage potential.









Size	PR	LI/SS	Tread Depth (mm)	M+S	<u> </u>		₩.	(C 4)))
205/75R17.5	14PR	124/122L	15	$\sqrt{}$	V	D	С	72dB	Α
215/75R17.5	16PR	135/133L	15	$\sqrt{}$	$\sqrt{}$	D	С	72dB	Α
235/75R17.5	18PR	143/141L	15	$\sqrt{}$	$\sqrt{}$	D	С	72dB	Α
265/70R19.5	18PR	143/141J	15.5	$\sqrt{}$	$\sqrt{}$	D	С	72dB	Α
285/70R19.5	18PR	150/148K	16	√	√	D	С	72dB	Α




MultiRoute EDR51



TECHNICAL FEATURES

The unique pattern ensures the fuel efficiency and even wear for lower operation costs.

The tread formula ensures grip and traction in low temperature environments.



The low deformation frame structure ensures long-term stability and durability for increased safety.





PR	LI/SS	Tread Depth (mm)	M+S	<u> </u>		₩.	(C -)))
18PR	149/146L	22	\checkmark	√				
18PR	150/147L	19	$\sqrt{}$	\checkmark	D	С	74dB	В
18PR	154/149L	22	\checkmark	\checkmark	D	С	74dB	В
18PR	156/150L	20	\checkmark	\checkmark	D	С	74dB	В
20PR	156/153L	22.5	V	√	D	С	74dB	В
	18PR 18PR 18PR 18PR	18PR 149/146L 18PR 150/147L 18PR 154/149L 18PR 156/150L	18PR 149/146L 22 18PR 150/147L 19 18PR 154/149L 22 18PR 156/150L 20	PR Ll/35 (mm) M+3 18PR 149/146L 22 √ 18PR 150/147L 19 √ 18PR 154/149L 22 √ 18PR 156/150L 20 √	18PR 149/146L 22 √ √ 18PR 150/147L 19 √ √ 18PR 154/149L 22 √ √ 18PR 156/150L 20 √ √	18PR 149/146L 22 √ √ 18PR 150/147L 19 √ √ D 18PR 154/149L 22 √ √ D 18PR 156/150L 20 √ √ D	18PR 149/146L 22 √ √ 18PR 150/147L 19 √ √ D C 18PR 154/149L 22 √ √ D C 18PR 156/150L 20 √ √ D C	18PR 149/146L 22 √ √ 18PR 150/147L 19 √ √ D C 74dB 18PR 154/149L 22 √ √ D C 74dB 18PR 156/150L 20 √ √ D C 74dB



MultiRoute ETR31



TECHNICAL FEATURES

Optimized wide tread and four-belt design improves longevity and enhances retreadability.

Increased tread depth and rectangle footprint promote even wear and mileage potential.



High conductive cord accelerates heat transition which helps lower rolling resistance and increases fuel efficiency.





Size		PR	LI/SS	Tread Depth (mm)	M+S	<u>^</u>		N.	(Co)))
385/65R2	2.5	24PR	164K	17.5	√	V	С	С	72dB	В





MixWork EDM60




TECHNICAL FEATURES

Exceptional resistance to damage by compounds with advanced resistance for tread to cuts and tears.

Durable casing design for maximum service life in demanding mixed work use.

Latest pattern designed for maximized traction in harshest terrain.









Size	PR	LI/SS	Tread Depth (mm)	M+S		₩.	(C-1))
13R22.5	20PR	156/150K	20.5	\checkmark	POR		
295/80R22.5	18PR	152/149K	17.5	\checkmark	POR		
315/80R22.5	20PR	156/153K	21	√	POR		




MixWork EAM61




TECHNICAL FEATURES

A special formula developed for abrasion resistance and anti-cut and chip capability for on and off terrain. A frame structure reinforced with UHT cord ensures a long life span.

A state-of-the-art wide-base pattern design with great control capability for on and off application.









Size	PR	LI/SS	Tread Depth (mm)	M+S		(L	₩.	(C +)))
385/65R22.5	20PR	160K	17.5	\checkmark	\checkmark	C	C	72dB	В
385/65R22.5	24PR	164K	17.5	$\sqrt{}$	$\sqrt{}$	С	С	72dB	В



MixWork EAM62





TECHNICAL FEATURES


The latest tread compound is used for outstanding mileage and resistance for high-scrub applications.

The reinforced bead construction provides excellent structural durability to extend tyre life.

A unique 4-ribbed zip-zag design provides outstanding handling for all-axle applications.






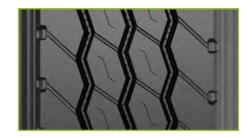




Size	PR	LI/SS	Tread Depth (mm)	M+S	<u> </u>	(L	₩.	(C))))
13R22.5	20PR	156/150K	18	\checkmark	V	С	В	72dB	В
315/80R22.5	20PR	156/153L	17	V	V	C	В	72dB	В

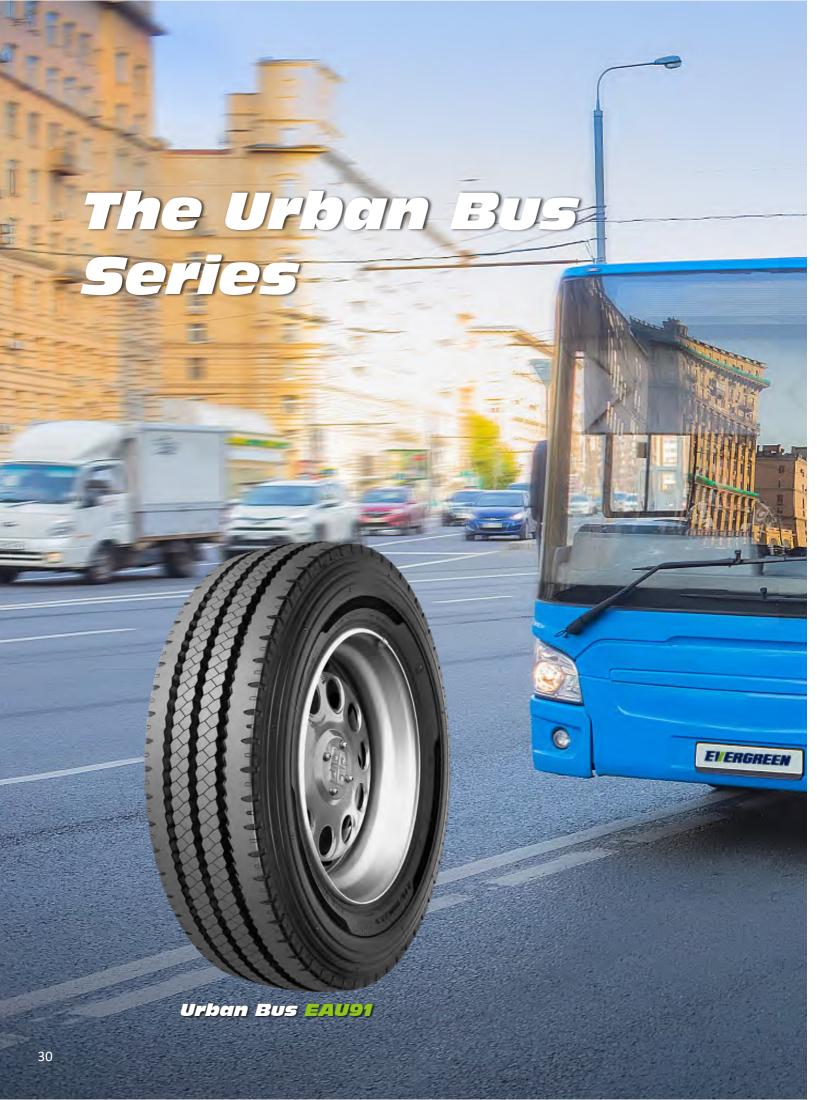



Urban Bus EAU91

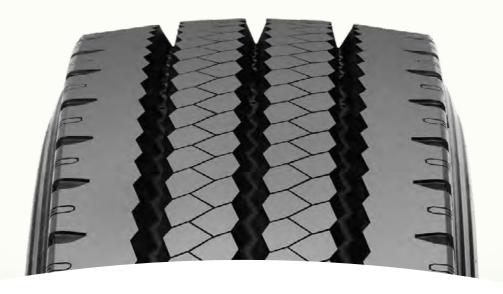


TECHNICAL FEATURES

The optimized tread zigzag pattern groove design supplemented by 3D sipes provides excellent driving and braking capabilities to ensure the safety performance of the bus.

Low heat generation and high wear resistance tread formula specially used for public transport prolongs the product's service life and increases the tire's mileage.

The design of the anti-scratch protective strip on the sidewall can effectively resist the sidewall damage caused by side stops and improve the service life of the tire.










Size	PR	LI/SS	Tread Depth (mm)	M+S			N.	(C 4))
275/70R22.5	18PR	152/148J	20.5	$\sqrt{}$	\checkmark	C	C	72dB	В

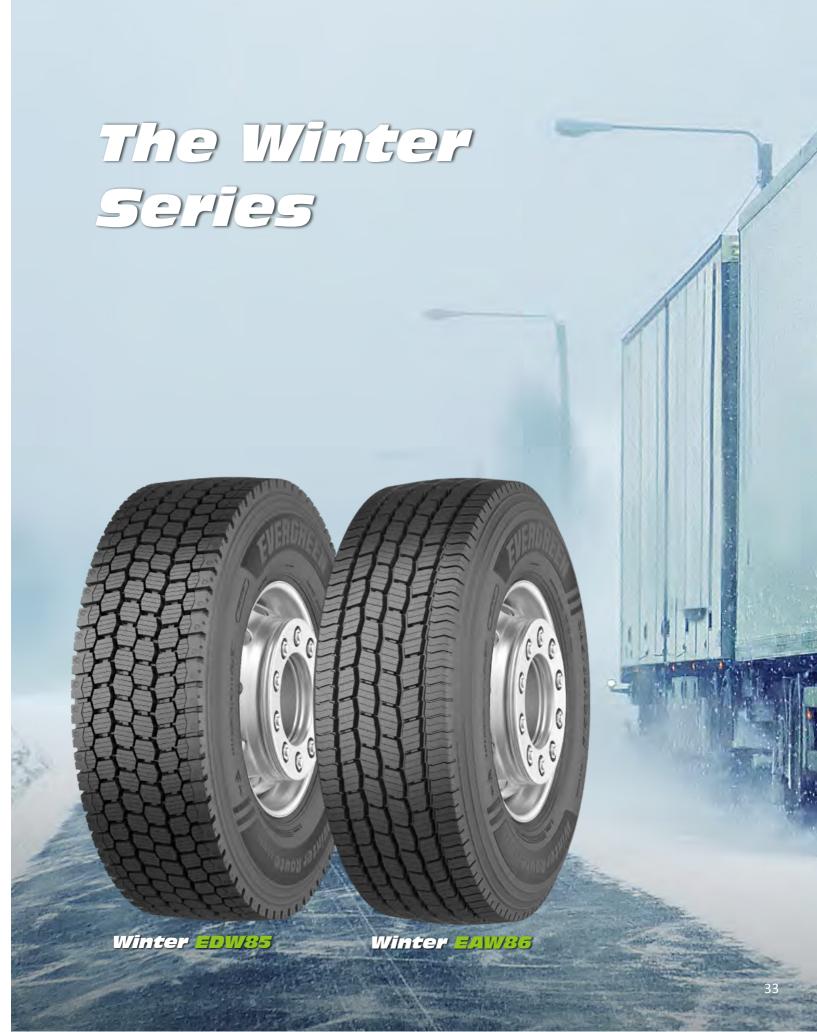



Winter EDW85




TECHNICAL FEATURES

Optimum arranged blocks prevent the tyre from irregular wear on the severe winter road surface.



Intense 3D sipes maximize the traction and braking on the wet and icy surface for better safety.



Unique tread formula designed for severe winter application provides the best level of traction and grip even in extreme temperatures.





Size	PR	LI/SS	Tread Depth (mm)	M+S		(₩.))
275/70R22.5	16PR	148/145L	20.5	\checkmark	V	D	В	74dB	В
295/80R22.5	18PR	152/149L	22	\checkmark	$\sqrt{}$	D	В	74dB	В
315/70R22.5	18PR	156/150L	20.5	√	\checkmark	D	В	74dB	В
315/80R22.5	20PR	156/153K	20	$\sqrt{}$	\checkmark	D	В	74dB	В



Winter EAW86



TECHNICAL FEATURES

The 3D-siping technology provides the best traction results driving safety.

Anti-slip blocks provide superior braking and stability on ice and snow surface.

Wider shoulder ribs deliver optimum stability and driver comfort.












REGROOVE GUIDEBOOK

WHY REGROOVING?

- More Grip
- More Fuel Savings
- More Safety
- More Longevity

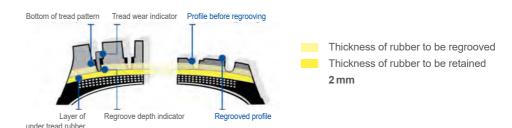

LineRoute



LineRoute

Pattern when new

Pattern when

70% worn





2mm

6-8mm



Pattern when new

Pattern when 70% worn

Pattern after regrooved



c:	Dimension Of Regroove		
Size	Depth	Width	
295/60R22.5	2mm	6-8mm	
295/80R22.5	2mm	6-8mm	
315/70R22.5	2mm	6-8mm	
315/80R22.5	2mm	6-8mm	



LineRoute

Pattern when new



Pattern after regrooved






LineRoute

Pattern when new

Pattern when 70% worn



regrooved



	Size	Dimension (Of Regroove	
	Size	Depth	Width	
	385/55R22.5	2mm	6-8mm	
	425/65R22.5	2mm	6-8mm	
	435/50R19.5	2mm	6-8mm	
	445/45R19.5	2mm	6-8mm	

MultiRoute

315/80R22.5



MultiRoute

Pattern when new

Pattern when 70% worn Pattern after

regrooved



Size		Dimension (Of Regroove
	Size	Depth	Width
	205/75R17.5	1.6mm	5-7mm
	215/75R17.5	1.6mm	5-7mm
	225/70R19.5	1.6mm	5-7mm
	235/75R17.5	1.6mm	5-7mm
	245/70R19.5	1.6mm	5-7mm
	265/70R19.5	1.6mm	5-7mm
	285/70R19.5	1.6mm	5-7mm
	295/80R22.5	2mm	6-8mm



MultiRoute



Pattern after regrooved

Pattern when

70% worn



Size		Dimension Of Regroove		
		Depth	Width	
	205/75R17.5	1.6mm	5-7mm	
	215/75R17.5	1.6mm	5-7mm	
	235/75R17.5	1.6mm	5-7mm	
	265/70R19.5	1.6mm	5-7mm	
	285/70R19.5	1.6mm	5-7mm	



MultiRoute

Pattern when



Pattern after regrooved

70% worn



C:	Dimension Of Regroove		
Size	Depth	Width	
275/80R22.5	2mm	6-8mm	
295/60R22.5	2mm	6-8mm	
295/80R22.5	2mm	6-8mm	
315/70R22.5	2mm	6-8mm	
315/80R22.5	2mm	6-8mm	



MultiRoute

Pattern when new



Pattern when 70% worn



Pattern after regrooved



Size	Dimension Of Regroove		
Size	Depth	Width	
385/65R22.5	2mm	6-8mm	



MixWork



MixWork

Pattern when new



70% worn

Pattern after

regrooved



c:	Dimension Of Regroove		
Size	Depth	Width	
12R22.5	2mm	6-8mm	
13R22.5	2mm	6-8mm	
295/80R22.5	2mm	6-8mm	
315/80R22.5	2mm	6-8mm	



MixWork EAM61

Pattern when new



Pattern when 70% worn

Pattern after

regrooved



6 1	Dimension Of Regroove		
Size	Depth	Width	
385/65R22.5	2mm	6-8mm	



MixWork

Pattern when new



Pattern when 70% worn



Pattern after regrooved



ı	C:	Dimension Of Regroove		
	Size	Depth	Width	
	13R22.5	2mm	6-8mm	
	315/80R22.5	2mm	6-8mm	

Urban Bus



Urban Bus *EAU91*

Pattern when new



Pattern when 70% worn



Pattern after regrooved



Size	Dimension Of Regroove		
Size	Depth	Width	
11R22.5	2mm	6-8mm	
275/70R22.5	2mm	6-8mm	
305/70R22.5	2mm	6-8mm	

Winter



MultiRoute EG801

Pattern when new



Pattern when 70% worn

Pattern after

regrooved



	Dimension Of Regroove		
Size	Depth	Width	
11R22.5	2mm	6-8mm	
12R22.5	2mm	6-8mm	
13R22.5	2mm	6-8mm	
315/80R22.5	2mm	6-8mm	



Winter EDW85

Pattern when new



Pattern after regrooved

70% worn



Size	Dimension Of Regroove	
Size	Depth	Width
275/70R22.5	2mm	6-8mm
315/70R22.5	2mm	6-8mm




Winter EAW86

Pattern when







Size	Dimension Of Regroove	
Size	Depth	Width
385/65R22.5	2mm	6-8mm



FÖRSÄLJNINGSVILLKOR

Denna lista annullerar alla föregående. Vi äger rätt att ändra den utan särskilt meddelande. Order antas endast med förbehåll att få debiteras till det pris som gäller leveransdagen. Priserna är exklusive moms.

BETALNINGSVILLKOR

Kontant eller enligt överenskommelse vid godkänd kredit. Dröjsmålsränta debiteras enligt våra allmänna leveransbestämmelser. Äganderättsförbehåll gäller till dess full likvid erlagts.

LEVERANSVILLKOR

Leverans till Återförsäljare eller hans helägda filial sker med Galdax distributionssystem. Önskas leverans på annat sätt, förbehåller vi oss rätten att debitera merkostnad.

SAJPNING

Vi kan erbjuda dig som kund sajpning av Galdax försålda däck. Priset är 350:-/däck netto (övriga däck 450:- netto.)

REPRESENTANTER

Mitt	Martin Carlsson	070-631 51 03
Väst	Henrik Lund	070-208 52 83
Öst	Stefan Vinlöf	070-257 03 32
Nord/Syd	Tony Almcrantz	070-208 52 41

CHAUFFÖRER

J. 10	
Anders Andersson	070-200 19 37
Calle Sjögren	070-208 97 71
Magnus Johansson	070-363 59 09
Kenneth Ottosson	070-208 51 89



GALDAX AB Cylindergatan 3 534 50 VARA Telefon Fax E-mail 0512 - 725 80 0512 - 121 55 info@galdax.se

